


■ KL Optic rectangel

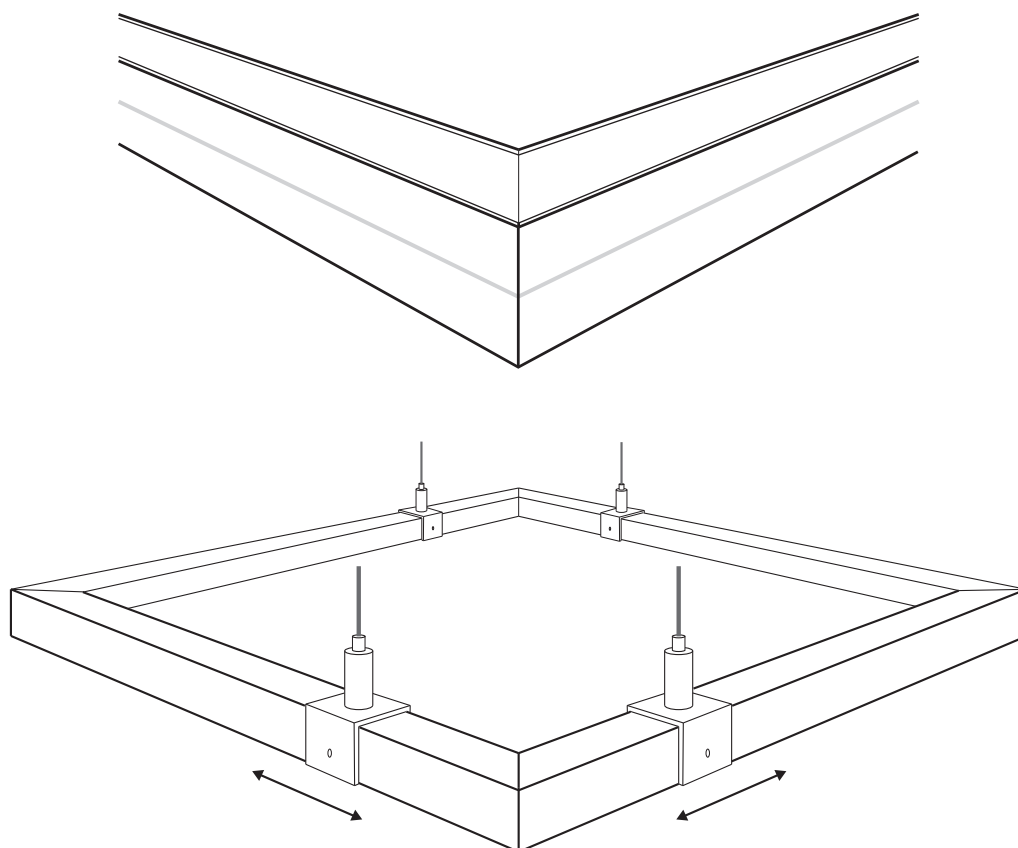

3W LED	160mm 	IP44 	max. 5 m 	20 x 20 mm 	 20°, 40°, 19° ov.	350mA — 700mA
 -30°C ... +40°C	3000K 3500K 4000K	DIM 				CE
 ALUMINUM	 RAL 9005	 RAL 9016				